



SCREENY 130 GPZ

ZIP GUIDED SYSTEM with CASSETTE



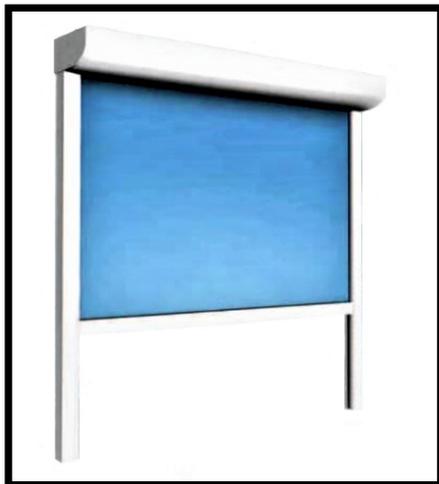


FEATURES:

- Maximum size; 5800m x 5000m / 20m² cloth size
- Cassette can be installed either face fix or ceiling(top) fix
- 60mm guide channels
- Bottom bar has optional tubular rubber weather strip
- White powder coated extrusions
- Operation; gearbox + crank handle or RTS motorized

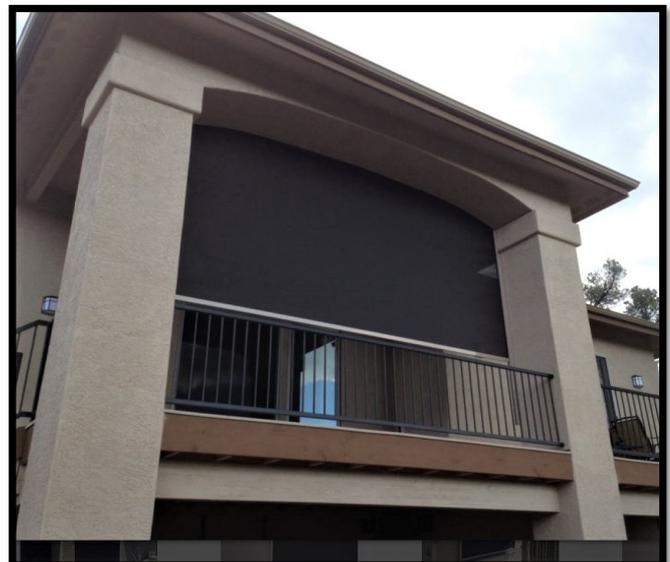

This system comes WITH a CASSETTE for protection against general weather. The 60mm zip guided channels along the sides not only controls the bottom bar during operation, but eliminates light gaps along the sides and provide protection against general weather. No vertical light gaps will be present along the sides of fabric.

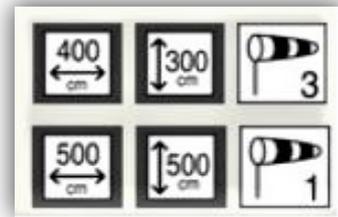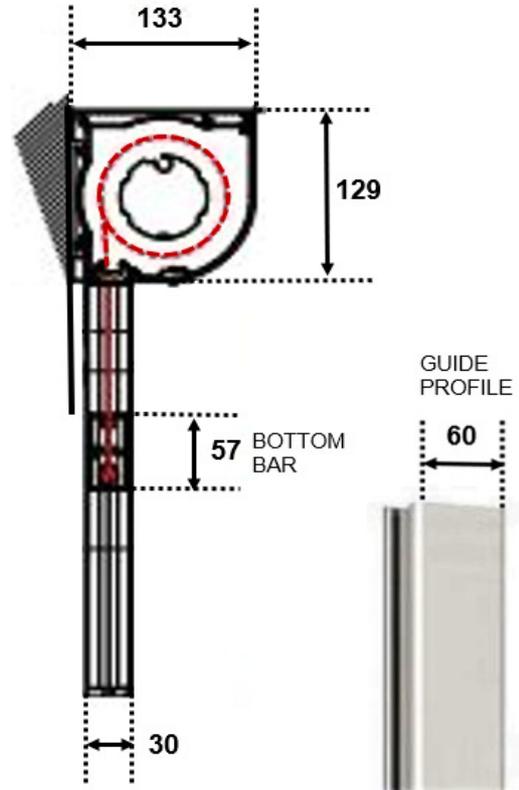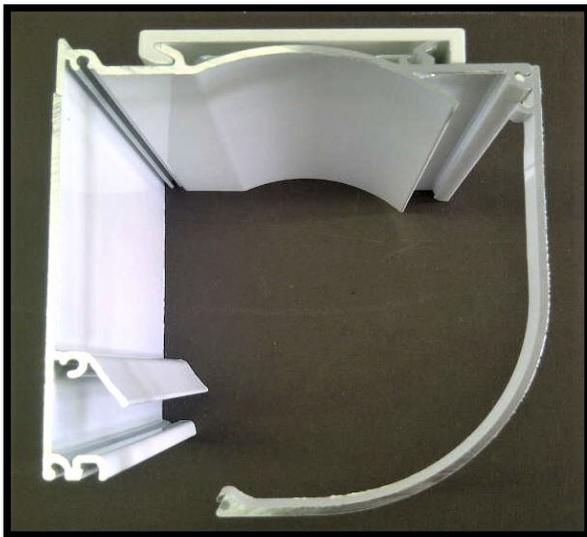

WIND CLASS	WIND SPEED M/SEC	WIND SPEED Km/h	SYMBOL
1	5.5-7.9	20-28	
2	8.0-10.7	29-38	
3	10.8-13.8	39-49	

SCREENY 130 Models are in conformity with the performance requirements according to UNI EN PR 13561:2004.

The results obtained through experimental and calculation tests, yielded characteristics corresponding to a static nominal wind pressure of 110 N/m^2 . The pressure has been applied orthogonal to the fabric surface and operating in a static and continuous way. The resulting Wind Class applies to the specified unit type and dimension. Units smaller than the rated dimension may well yield performances higher than the tested wind class.

