


FORENZA STORBOX RETRACTABLE PATIO AWNING (CASSETTE TYPE)

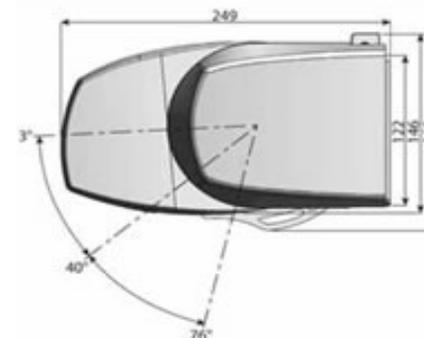

FULLY ASSEMBLED WITH ACRYLIC TEXTILE COVER

Overall Awning Width	1800	2400	3000	3600	4200	4800	5000
PROJECTION MM	MM	MM	MM	MM	MM	MM	MM
1500 Minimum width 1950mm							
2000 Minimum width 2450mm	x						
2500 Minimum width 2950mm	x	x					
3000 Minimum width 3450mm	x	x	x				
3500 Minimum width 3950mm	x	x	x				

x = cannot be made = see price list

The awning can be mounted on face or top fixed and is fully adjustable from 0 degrees to 76 degrees, recommended pitch for rain water run off is 15 degrees. Control is by reduction gear box only operating handle (1200mm included in prices) or alternately by electric motor with or without automatic sun/wind control.

Notes

- 1 Electrical control - see price list
- 2 Sun/Wind control -used in conjunction with electric motor - see price list
- 3 All awnings are complete with mounting brackets for top or face fixing - please specify
- 4 A 1200 mm long gear operating handle is supplied with all gear controlled awnings.
A 1500, 2000 & 2500mm are also available.
- 5 The size you order is the overall size you will receive.
- 6 We do not recommend the application of P.V.C. coated, or Protent, Mode or Sheerweave fabrics on the folding arm awnings.
- 7 Please note cover width= overall width less 110 mm gear controlled.
Cover width = overall width less 70mm with electric control.
- 8 Prices are based on Canvas Acrylic Fabrics
- 9 **Please read Awning notes when placing an order.**

Arm Strength

Arms strength ranges from a wind speed of 28kph to 49kph, depending on the size of the awning.
Please see Wind Resistance Chart

Options

Electric Motors and Controls - see price list
Crank 1500mm
Crank 2000mm
Crank 2500mm

IT IS THE AIM OF VENTOLITE AWNINGS TO CONTINUALLY IMPROVE ITS PRODUCTS, THE RIGHT TO ALTER DESIGNS OR SPECIFICATIONS IS THEREFORE RESERVED