



FOLD ARM AWNINGS

with or without SEMI CASSETTE

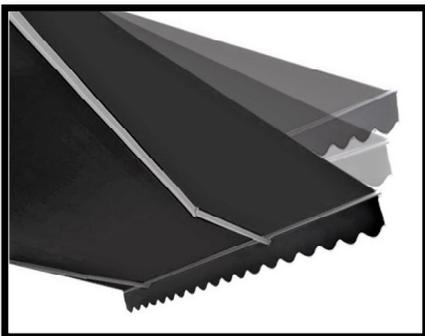

Our **FOLD ARM** awning is a well-designed, versatile system that can cope well with wind, rain and sun at various angles. This awning is sturdy in design and boasts heavy duty arms with a double cable system. An added feature to this system is the **VARIABLE TILT ADJUST** bracket. This optional extra enables the client to adjust the incline of the awning, as and when required, between 5° and 35° down tilt from horizontal position. This is easily done by hooking the crank handle into the eye of the tilt adjust mechanism and cranking until the awning is at the desired angle. Spirit levels built into the front profiles allow for easy alignment of the front bar after adjusting. With non-tilt units the arm angle is fixed in position at the desired tilt angle by the installers; remains constant and cannot be adjusted by the client.

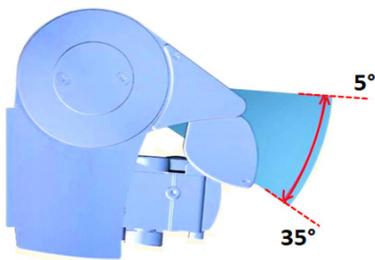

The awning is available with or without a cover cassette. This semi-cassette provide weather

FOLD ARM AWNINGS

ACRYLIC FABRIC, NO CASSETTE, MANUAL OPERATION VIA GEAR & CRANK



ACRYLIC FABRIC, WITH SEMI CASSETTE, MANUAL OPERATION VIA GEAR & CRANK






ACRYLIC FABRIC, WITH SEMI CASSETTE, MANUAL OPERATION VIA GEAR & CRANK AND TILT ADJUST BRACKET



protection for the fabric when retracted.



Operation can be either manual, via gearbox and crank handle, or RTS motorised, via remote control.

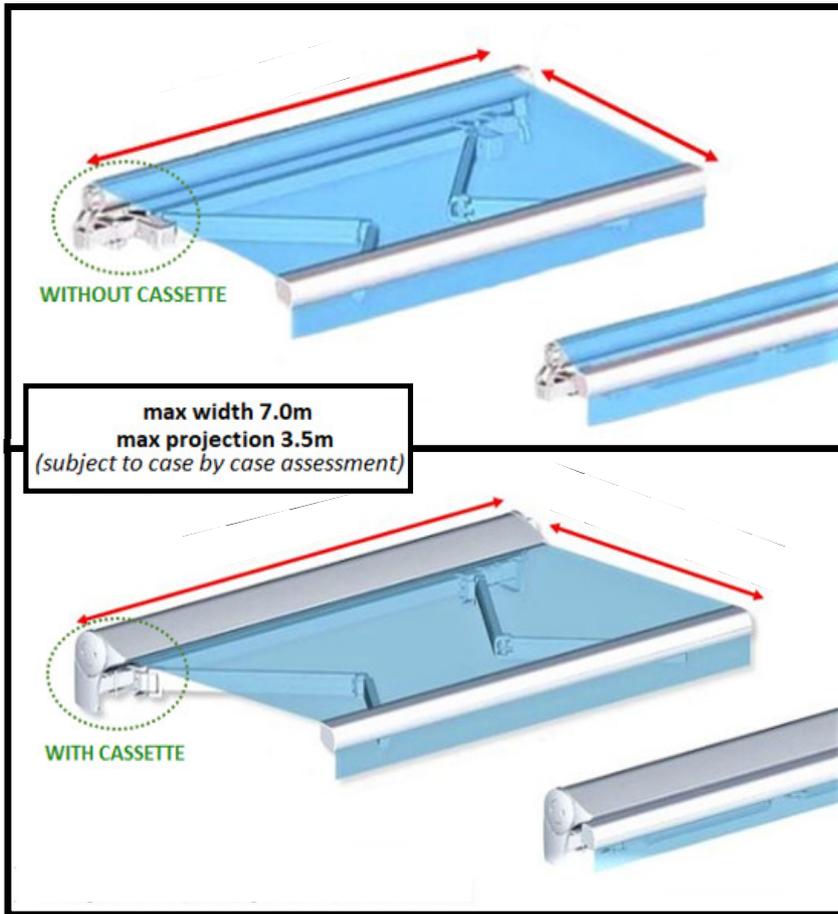

SPECIFICATIONS

- System colour — RAL9010 Pure White or as per client specification (subject to increase in lead time as well as +20% increase on unit price).
- Extrusions & castings — Aluminium
- Gear — Zamak, Aluminium, Galvanised Steel and Stainless Steel
- Roller Tube — Galvanised Steel
- Maximum width — *7.0m
- Projections — 1.5m, 2.0m, 2.25m, 2.5m, 2.75m, 3.0m & 3.5m

** Subject to case by case assessment; third fold and/or telescopic legs might be required.*

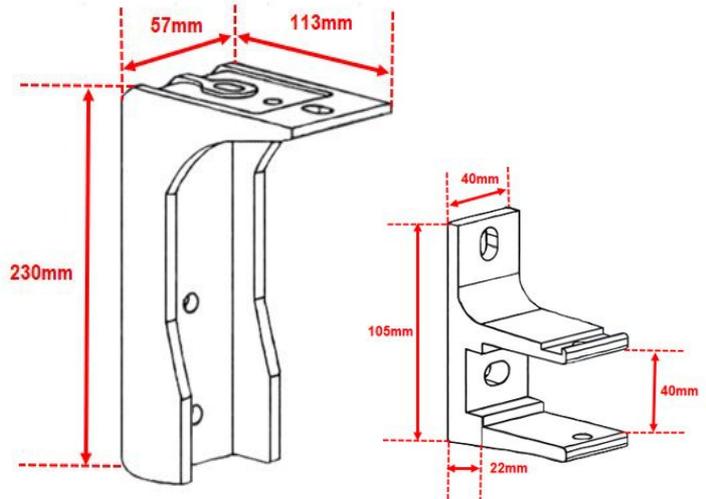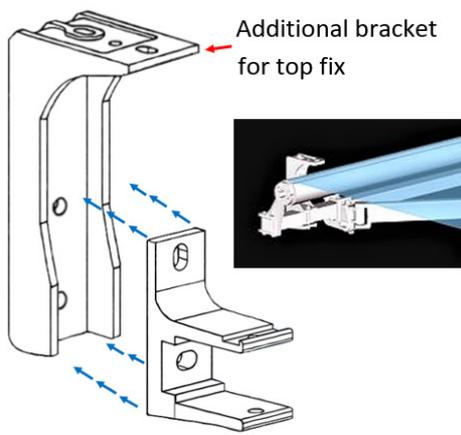

MAXI FULL CASSETTE FOLD ARM AWNING



Our **MAXI FOLD ARM** awning comes standard with a full cassette; enclosing the fabric and arms completely when retracted.

With its double stainless steel sheathed cables it is a well-designed, versatile system that can cope well with wind, rain and sun at various angles.


The awning mounts on two brackets which allows for easy installation in either the top fix position or the standard wall mount / face fix position.

Operation can be via gear box & crank handle or motorised with remote control.

WARRANTY: 2 years against manufacture defects, excluding corrosion weather and operator negligence damage.



**SAME
PRODUCT**

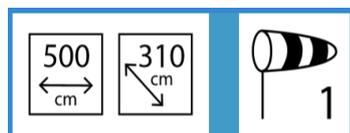

Maximum
wind speed
of 27kms



Maximum
wind speed
of 37kms



SPECIFICATIONS

- 70mm Galvanised Steel Roller Tube for widths <5m | 80mm Galvanised

Steel Tube for widths >5m.

- 11:1 Gear-box is standard -motorisation is an optional extra
- System colour — RAL9010 Pure White (Additional cost for different colours)
- Max projection; 3100mm
- Max width; 5800mm
- Pitch adjustment from **90 to 15 degrees** is possible with **top mounting** and from **0 to 75 degrees** with **wall mounting** (*Pitch is set at installation*)

