

# QUALITY AFFORDABLE FURNITURE & FOLDING DOORS

Let us help transform your kitchen & home into a show piece



We also offer vinyl / wood folding doors

**083 44 11 238**

[www.qaf.co.za](http://www.qaf.co.za)

### **Vinyl Folding Door Info:**

- Vinyl folding doors are constructed with internal fully hinged pantograph hinges connected via a 5mm galvanized steel rod frame.
- The doors are attached to self-lubricating nylon wheels running on an aluminium top track.
- The vinyl material is attached to the frame using clips.
- The doors can be stacked to one side or be centre opening and then stack on both sides.
- They are suitable for closing off large areas and can be made to most sizes.
- The highest door successfully made to date is 5.5 meters high.
- The width of a standard door in the stacked position is approximately 220mm.
- Vinyl Folding Doors under 1.5 meters wide are fitted with a unique catch-back system to prevent the door from springing open when stacked. Larger doors have a clip on strap.
- All doors higher than 2.5 meters are fitted with pull rod arm, at an extra cost to facilitate opening and closing.
- The doors are made of flexible and durable vinyl material.
- They are fully washable (suggest use handy andy) and have a two-year warranty on the frame.
- The acoustic qualities of a vinyl folding door are equivalent to a hollow core door.
- Sound reducing material can be fitted to the inside of the door to improve the acoustic qualities upon request.
- The depth of stack per door is 78mm + 51mm per 305mm of opening.
- The weight of the vinyl folding door is approximately 10kg/m<sup>2</sup>.
- Suitable for inside use only & popular for bathrooms & bedrooms, especially where space is an issue. Doors are long lasting.

### **Wood Folding Door Info:**

- Wood folding doors have the same top track and self-lubricating nylon wheels as the vinyl doors.
- The wood panels have an aluminium hammer-tone coated outer frame or other colours with special hard plastic inserts that attach on one side of the wood panel and swivel in an aluminium hinge.
- The wood panels are available in double-sided 9mm MDF veneer type wood look, in various colours such as Wenge, Royal Mahogany, White, Cherry Royale, and Walnut. Not all options are always available.
- Panels can also be supplied out of 9mm plywood and stained/sealed in a few stains or can be supplied via 9mm MDF panels and then painted in most solid colours & sealed.
- Wood doors are fairly heavy and can only be made to heights of around 2.8m.
- All doors higher than 2.5 meters are fitted with pull rods at an extra cost to facilitate opening and closing.
- Door handles are metal colour with an integral barrel lock that can be operated with a key on one side of the door.
- 2 keys are supplied for all locks.

## Measuring

- Before ordering, measure the door opening. The drop of the door (height from the floor) and the width accurately. Measure at 3 points and take shortest distance.
- For the height/drop, use the shortest size and make the door around 15 to 20mm shorter to allow for a small gap above the floor. The deducted size.
- Advise which side of the door requires the key to be.
- Stand in the door frame with your back against the side where the door is not stacking and advise if the lock will be on your left or right hand side.

## Installing Door into door frame


Open box , you should have the following:

- Door
  - Screw pack
  - Top track
  - Locking post with locking plate
  - Timber strip
- 
- Ensure the door frame is level, square, and parallel to the opposite side of the door frame.
  - Install small spacers behind posts/top track if necessary to maintain level and square.
  - Place the top track to the opening on the top door frame and mark the predrilled holes. Sometimes needs to be shorten a bit & then burs removed.
  - Remove the track, drill the holes, and install the plastic inserts.
  - Refit the top track and place the centre screw only, leaving it a little loose.
  - Check that the track is clean and insert the door via the runner wheels, ensuring the lock is on the correct side.
  - Place the locking post centered on the required side under the top track, making sure it is straight and level down the frame to the floor.
  - Make sure the locking hook plate is correct way up and underneath the locking post against the frame.
  - Align the striker plate to the lock eye and mark the predrilled holes.
  - Drill the holes, fit plugs and locking post.
  - Install the timber strip provided in the centre of the top track on the stacking side/jam side.
  - Place the door into the top track and screw in the remaining two screws into the top track.
  - Attach the rear door end over the timber strip and screw in the small self-tapping screws through pin holes in the door on both sides.
  - The door has an internal back catch to keep it in the stacked position, and turning the handle releases the internal catch.
  - Bring the door to the lock position and test the lock catches on the lock hook.

- If internal catch is not locking, then jam post is not square. i.e doors is at slight angle, must be rectified.
- If everything is okay, open the door and install the foam strip into the locking post recess.
- Use a screwdriver to place small quantities of Vaseline into the top track along the length of the track on both sides.
- Open and close the door a few times to lubricate the door track with the Vaseline.
- Clean the door with handy andy and it will be ready for many years of service.
- Especially when have tiles...check that all surfaces are square & parallel.

Tools required for installation, not specified in the document.



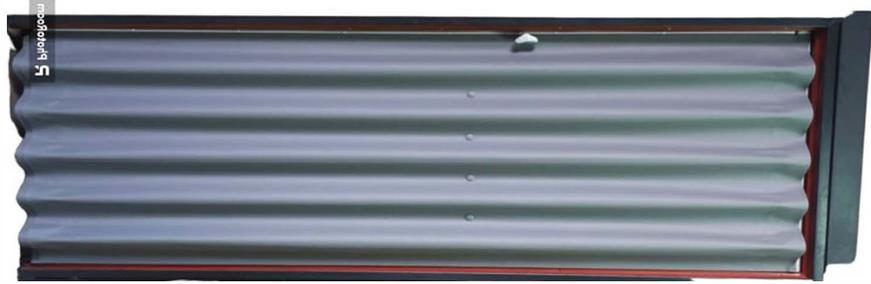






Vinyl Colour swatches



Wood Venner Colours

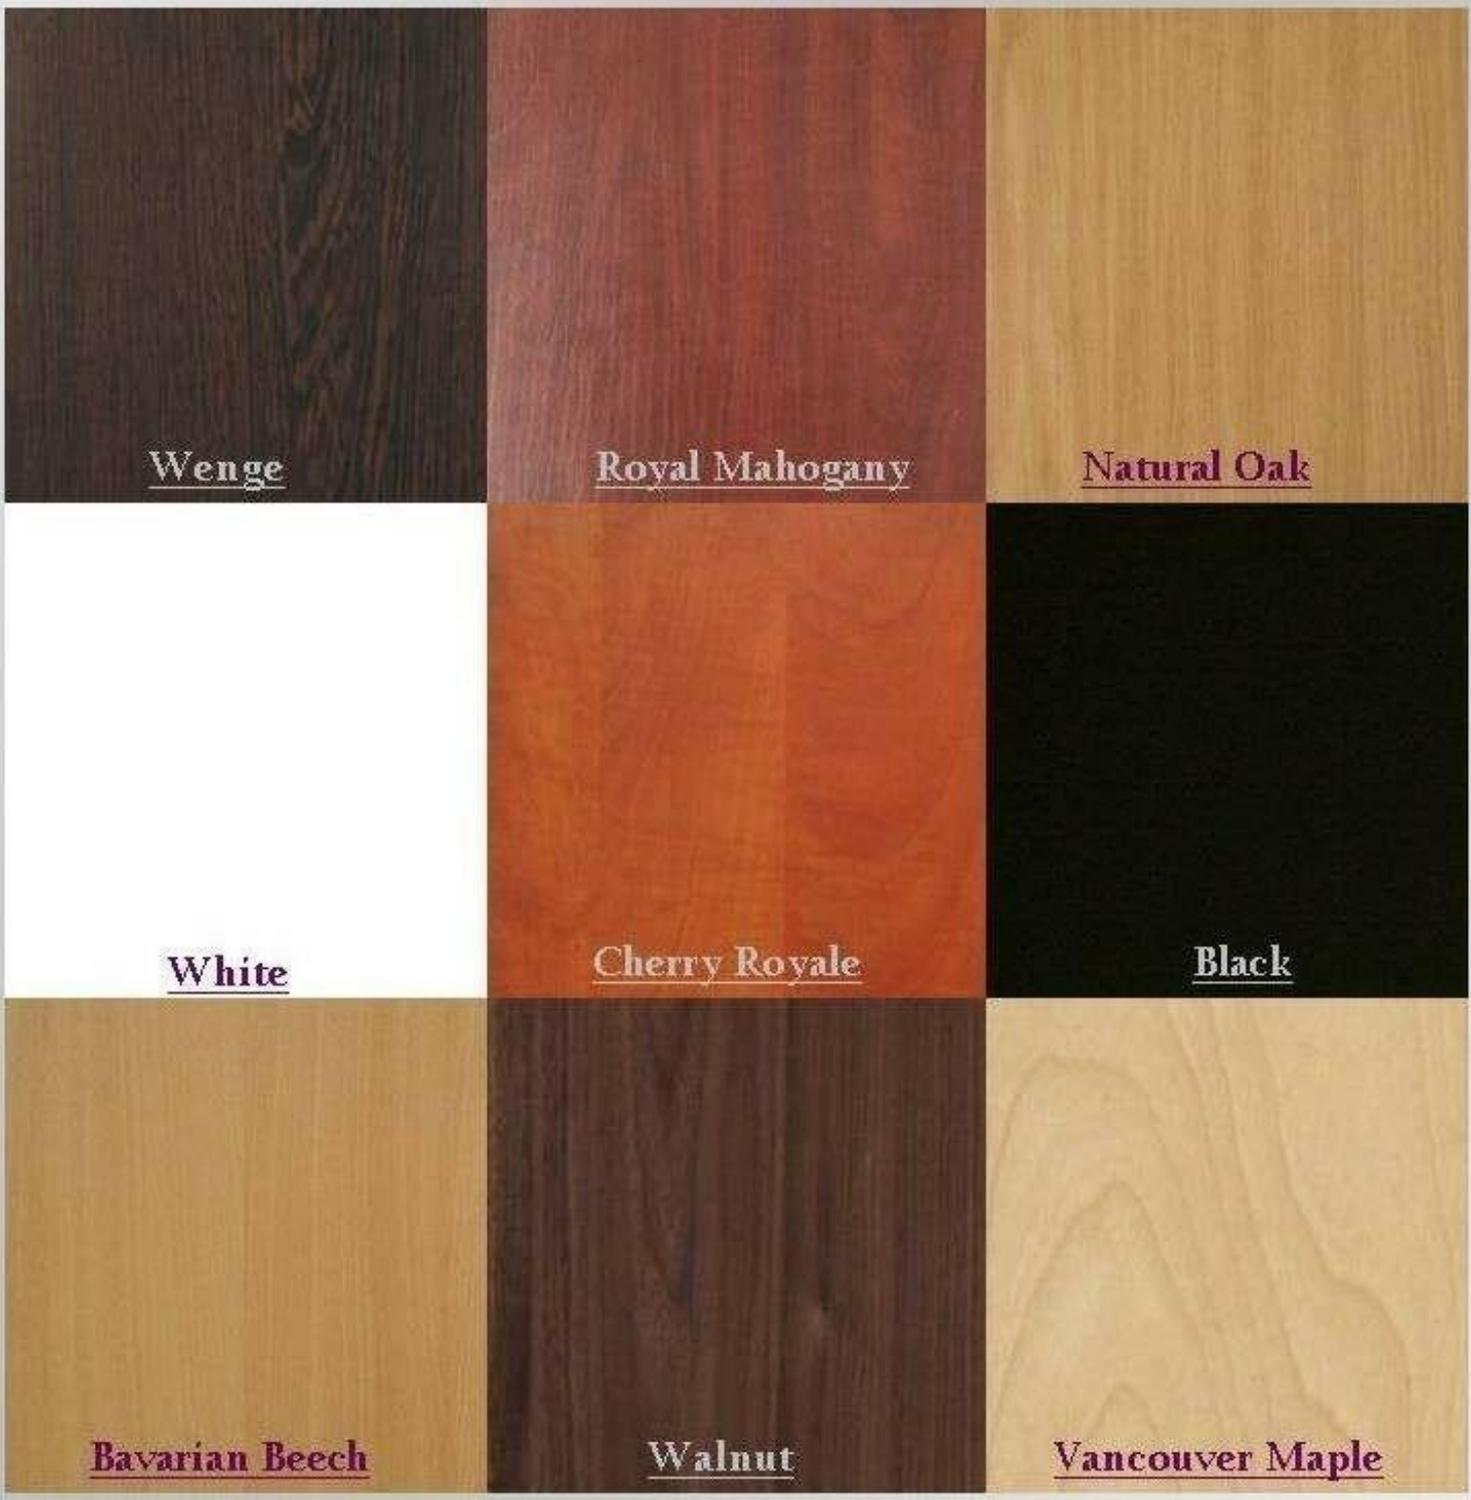

## Product Update – Folding Doors with Plywood Panels

Please note: our stock of solid wood boards above is now very limited, and unfortunately, they are no longer available from our supplier, but still have some boards available.

As a new option, we are pleased to introduce **wood folding doors with plywood panels**. These panels offer flexibility in finishing:

- Can be stained with popular Dulux Woodguard or Gripseal wood stains
- Can be painted in solid colours and sealed for durability

✦ **Important Detail:** The plywood has a natural rough-grain texture with knots. This rustic character will remain visible even under solid paint colours, giving each door a unique, authentic wood look.



26mm f/1.79 1/33s ISO587  
2026/01/13, 10:25



vivo V60 Lite 5G |