




SCREENY 130 GP

20mm GUIDE PROFILES with or without CASSETTE



FEATURES:

- Maximum size; 5880m x 5000m / 25m² cloth size
- Roller tube brackets can be either top-, face- or side fix
- 20mm guide profiles
- Bottom bar with double groove for main cloth & weather flap if required
- White powder coated extrusions
- Operation; gearbox + crank handle or RTS motorized

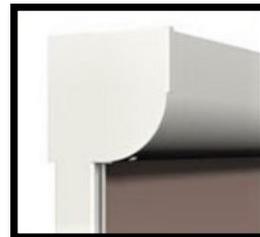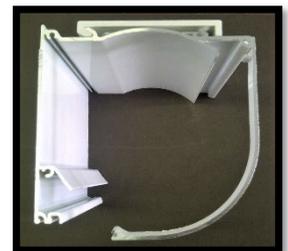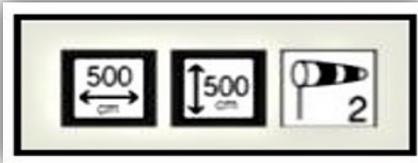

This system can be installed either WITH a CASSETTE, for protection against general weather, or WITHOUT a CASSETTE.

The 20mm guide profiles along the sides control the bottom bar during operation.

Vertical light gaps will be present either side of fabric.

Can be supplied with or without bottom bar locking devices.

Can be supplied with or without weather flap.



SCREENY 130 Models are in conformity with the performance requirements according to UNI EN PR 13561:2004.

The results obtained through experimental and calculation tests, yielded characteristics corresponding to a static nominal wind pressure of 110 N/m^2 . The pressure has been applied orthogonal to the fabric surface and operating in a static and continuous way. The resulting Wind Class applies to the specified unit type and dimension. Units smaller than the rated dimension may well yield performances higher than the tested wind class.



WIND CLASS	WIND SPEED	WIND SPEED	SYMBOL
	M/SEC	Km/h	
1	5.5-7.9	20-28	
2	8.0-10.7	29-38	
3	10.8-13.8	39-49	